

# FLOOR DUCT HEATING

## Technical Description

### The Duct Casing

The duct is constructed of 1.5mm zinc tac steel and is manufactured to customers' specifications.


### The Grille

Roll up, linear and punched grilles are available in various materials and a selection of anodised finishes.

### The Convector Element

The element comprises round steel tubes on which steel convector fins are pressed. The unit is supplied in a black painted finish. Convectors are manufactured with 15mm same end connection as standard.

The maximum service pressure is 4 bar. Higher service pressures are available on demand.

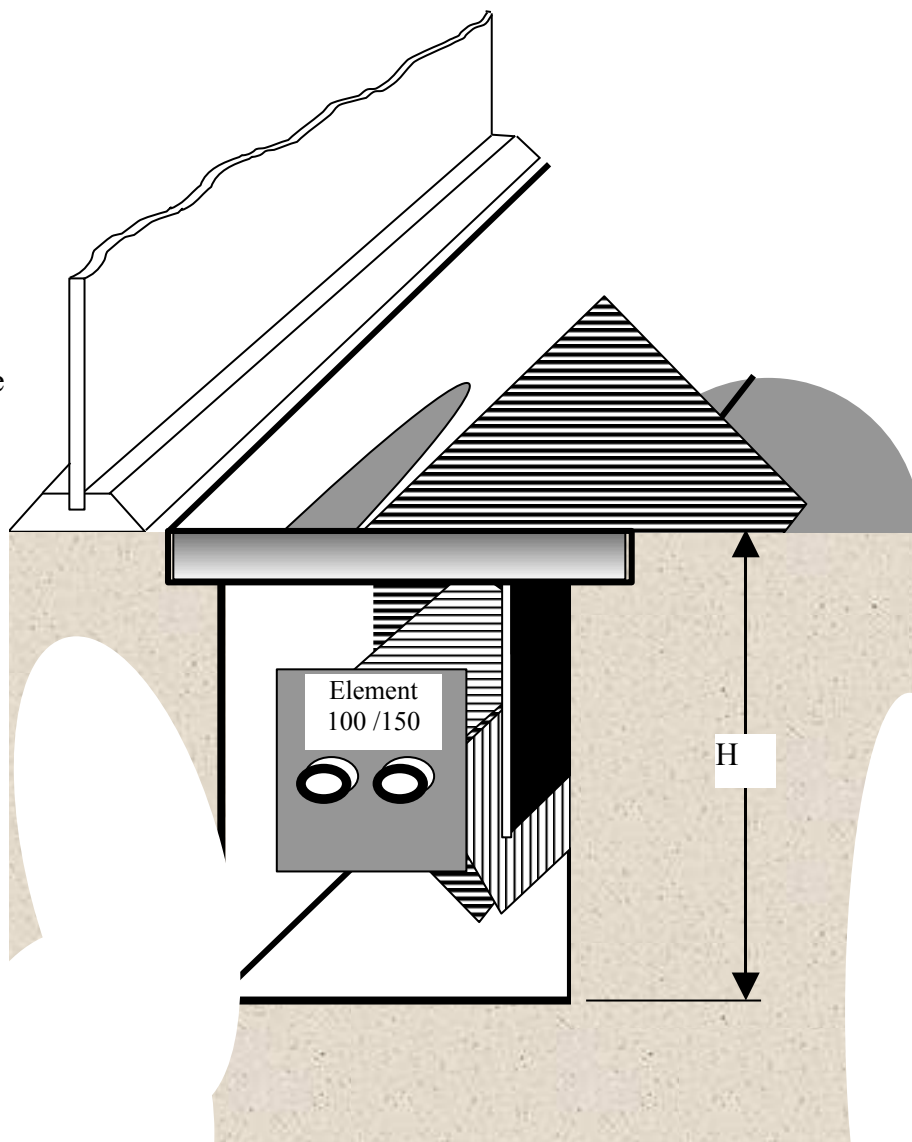

	Duct	Element			
	Depth (H)	100S	100D	150S	150D
Output per meter @ $\Delta 56^{\circ}\text{C}$	200mm	633	~	946	~
Output per meter @ $\Delta 56^{\circ}\text{C}$	300mm	753	974	1163	1518
Output per meter @ $\Delta 56^{\circ}\text{C}$	400mm	867	1127	1247	1614

# *K. V. RADIATORS*

6 POSTLE CLOSE KILSBY, NEAR RUGBY, CV23 8YG. TEL: 01788 823286 FAX: 01788 823002